
Type AQUA

Water supply plug valve



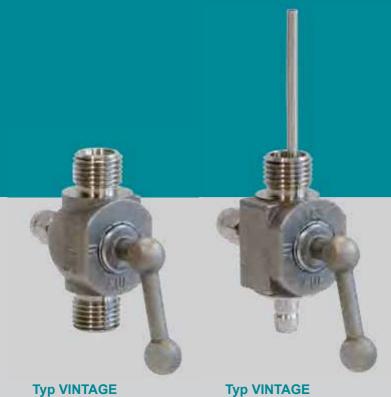

• valve position: **OPEN, CLOSE and RESERVE**

• stainless steel design

Connection G 1/4 Range of application:: -60 < T < 230/°C

Design characteristics

• maintenance-free, self-lubricating

no drying-out or sticking of the

• changing of existing house water supply

• free of cavities (no sedimentation) maintenance-free, self-lubricating (PTFE)

DN 40 / PN 16 - PN 25 face-to-face dimension 240 mm Range of application:: -60 < T < 230/°C




- tight for yearst
- open and close with quater turn, even after a long standstill


stainless steel 1.4408 •

- without stuffing box
- no coating required
- DVGW certification

Option

• remote operation

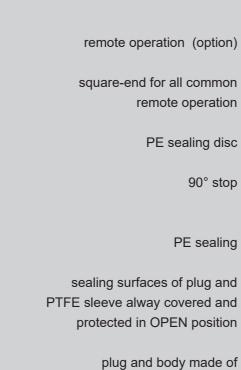

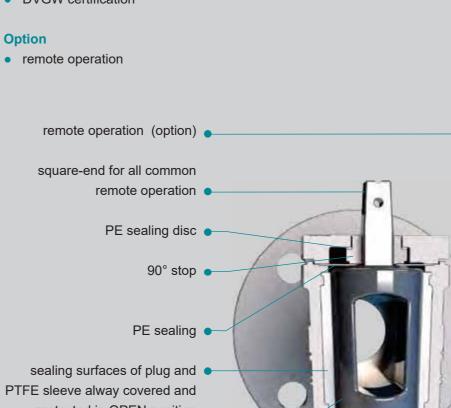



oil cock with reserve option

Option


seal

nylon filter

cavity-free

PTFE sealing

- hose connection
- special connection

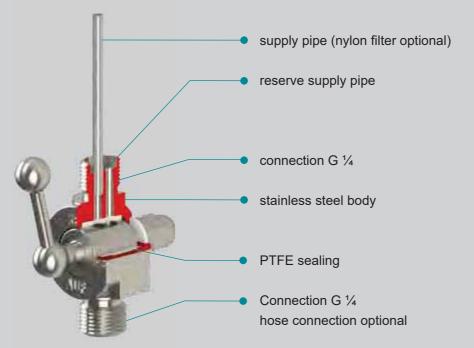

84